

Newcomers to this fascinating hobby, or those new to the construction of a Mantua Group period ship model, sometimes have questions when they start to work such as: "How big an obstacle is the planking? Is it possible to have something additional in the way of equipment or instructions to help in this most important part? Are there any photographs or diagrams that may help?" To assist you, we have produced this short instruction sheet in an attempt to lessen any problems you may encounter.

PLANKING OR THE APPLICATION OF STRIPS

First, a short note on the background. Each vessel was originally clad with large wooden boards positioned longitudinally or diagonally to the line of the hull, either with one plank overlapping the next (clinker-built), or plank one adjacent to the next (carvel-built), and nailed onto the ship's frames. This covering, in addition to being necessary for buoyancy (after caulking and sealing the joints) also gave considerable strength to the whole vessel.

In the case of our own models, because of the nature of the materials used, the planking will be accomplished using not short planks, but with full strips wherever possible, and doubled up in most cases, as they were in the original vessels. This technique is made possible through the flexibility and quality of the materials provided.

To achieve a high quality finish to the planking, we suggest the following system that we consider is most effective, and which is demonstrated in the diagrams on the last page.

The planking operation begins on plan number 1 of each of our model's instructions. The position of the first plank is shown on a profile of the skeleton structure after assembly. This reference point normally corresponds to the highest point of the two or three central frames and coincides with the lowest point of the curve formed by the extreme tops of the frames themselves. Where required, use a strip bender to curve the plank so that it fits the shape of the hull.

The first strip applied must be perfectly parallel to the line of the keel and should be fitted at the bow, the other end projecting beyond the length of the hull as in Fig.1 below. If the ship is to be double-planked, the initial planks may be glued and lightly pinned to the frames. The pins are to be removed once the assembly has properly set. Please note that where the upper sections of the frames are to be removed later, the planks should be pinned only at these places, i.e. no glue applied.

Proceed in the same manner from the top to bottom, fitting each plank snugly against the other, checking that they can be positioned easily without having to unduly force or twist the plank longitudinally. **Be sure to cover each side of the hull alternately, working three to four planks at a time. This avoids twisting the hull.**

After a number of these 'easy' planks have been fitted, a certain amount of difficulty will be encountered in placing subsequent strips, as the planks will now want to overlap in some places. You will now have arrived at the curve or sheer, of the vessel. Planking now requires a different procedure. All the planks must adhere to, and lie flat against, the frames for their entire width without curling, twisting or forming strange and unwanted 'ears'. We need to overlap the new plank on the previously positioned plank, allowing the strips to guide us in determining at what point the overlapping is to begin at each end. Position this overlapping plank without gluing onto the central two or three frames of the hull (see Fig.2), holding the ends down

with your fingertips, mark both ends where they overlap, with a pencil. Cut along the lines drawn, using a sharp craft knife (see Fig.3).

Reposition the cut strip on the hull, fitting it snugly against the preceding plank, making slight adjustments to the angled cut as necessary, to ensure an exact fit.

Now glue and pin the trimmed plank into position. Proceed with this method working towards the bottom of the hull i.e. towards the keel. Note that if this operation is carried out with due care, the planking will create the beauty of a wood inlay as the pieces fit together smoothly.

After proceeding in this manner for a while, we arrive at a point where the strips begin to leave a space (rather than overlapping). Irregular shaped spaces appear at the bow and stern ends of the strips as we position them alongside the preceding strips. Even in this case, let the strip itself guide you. Fix the strip into position, letting it follow its own natural curve. The spaces that are left, normally acute triangles, will be filled later with segments of strip carefully cut to shape (see Fig.4).

After the lower portion of the hull has been completely covered, proceed to cover the upper areas along the upper deck parapets (if this is relevant to your model), leaving the ends of the strips extending beyond the parapet line. This will be trimmed away later to achieve the correct outline when measured against your drawings (see Fig. 5). After the application of the first layer of planking over the entire hull, it will be necessary to smooth down the surface, removing the inevitable remains of excess glue, and leveling off any small imperfections in the planked surface.

Having finished the surface to your satisfaction, if you are working on a kit that is double planked, proceed to apply the second and final layer of planking. This will be the layer that is visible. Having gained the skills carrying out the first level, you should now be well able to ensure that the quality of the second layer is of a high standard.

The second planking will follow the same process, and, assuming a good level of preparation, should be somewhat easier.

In some instances, strakes or rubbing boards that stand proud of the planking should be fitted to the first level of planking, where indicated on the drawings. However the instructions may well direct you to fit them after the second-level planking has been completed.

FINISHING

When the final planking has been completed and the glue is fully set, the next task is to smooth the entire hull. We suggest the use of a scraper, a small wood plane (set fine) and various grades of sandpaper.

At this point, after having trimmed off the excess planking, according to the general profile at the parapet line, proceed to install the handrails and the gunwales, which are those planks that extend beyond the planking.

For the handrails, since they will be placed flat it will be necessary, especially at the bow and stern sections, to cut the strips into small angled (trapezoidal) sections in order to follow the curve of the hull (see Fig 6). The joints between these sections should be carefully sanded to make them as invisible as possible and to achieve a smooth, continuous curve.

For the gunwales, the strips will be fixed "edge on". The thickness of the strips (usually 2mm.) means that it will be necessary to pre-form them to fit the curves. We

suggest the following methods to achieve the desired curve. i) If only a slight curve is required, use a standard plier-type plank bender. If a deeper curve is needed, ii) soak the strip in very hot water for a minute or two, then carefully bend and hold the strip in position against the hull or over an object of the right shape until set. Alternatively, iii) wet the strip and use a wheel-type bender.

When the strip dries out it will be stabilized and can be placed into position. If there are a number of these pieces to make, build a jig to save time and increase accuracy.

At this stage, after ensuring the main decks are properly positioned, cut out the sections of the frames that are visible above the decks (extending up to the parapet tops), and smooth them off level with the deck surface. Proceed to plank the inside faces of the bulwarks, covering the inside of the first layer of white planks. Carefully sand this last section of planking smooth using progressively finer grades of sandpaper.

The foregoing briefly describes the subject of planking in an effort to assist the beginner with what appears to be a rather daunting task but which can become a very satisfying achievement. The rest "as they say" is up to you. Take your time; use your own skill and ingenuity to develop your own methods having considered our suggestions.

TOOLS FOR THE JOB

Each individual may have their own idea about how many, or what type of tool to use and what to use them for. We set out below some general advice of modeling tools and their uses for your consideration. These are just some of the tools available. Please ask your supplier for details.

- **Craft Knives.** There are a number of sizes available, the larger handle being the most useful. There are many blades available from straight edge to curved and chisel ends, together with saw blades, etc.
- **Plank Benders.** There are two main types: i) plier-type strip bender for forming dry planks (used in most applications); ii) wheel-type bender suitable for bending wet planks.
- **Strip Clamp.** This is a quick release clamp for holding strips whilst you trim them. This also doubles as a hull clamp allowing you to work with both hands on intricate work.
- **Pin Pusher.** This tool is spring loaded. A pin is inserted headfirst into the barrel then the tool is used to punch the pin into the wood, removing the need to hammer pins in delicate places.
- **Balsa Plane.** A small plane with a razor-type blade, and can be set for a fine cut.
- **Scraper.** A razor-type blade used for finishing flat surfaces.
- **Pin Vise.** A tool that looks like a jeweller's screwdriver but with collets of varying size, and which can take the smallest drill bit and act as a twist drill.
- **Sanding Stick.** A small plastic spring-loaded stick with a tapered end that takes a thin sanding belt, for sanding in tight places.
- **Razor Saw.** There are various grades of miniature saw blade available that all give a very fine cut. They are usually tenon-backed and can be obtained in sets to include the handle, mitre box, or just the blade.

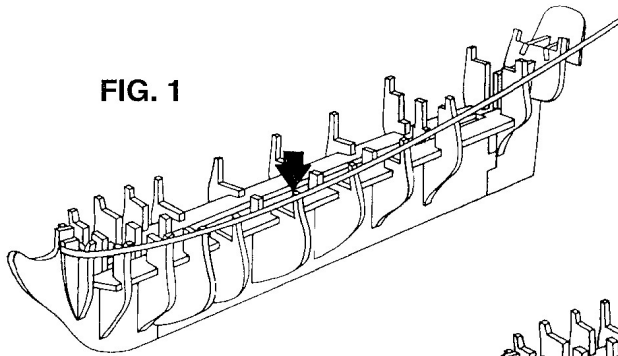


FIG. 1

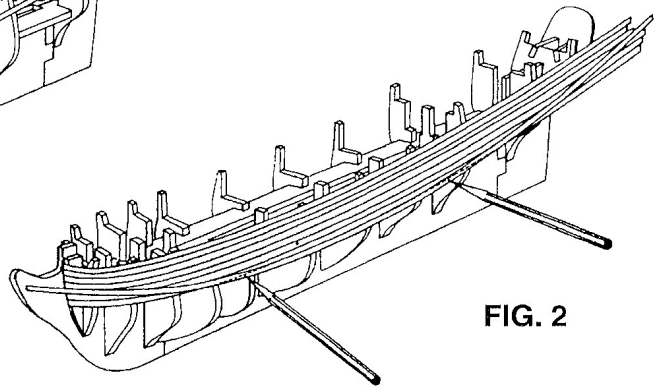


FIG. 2

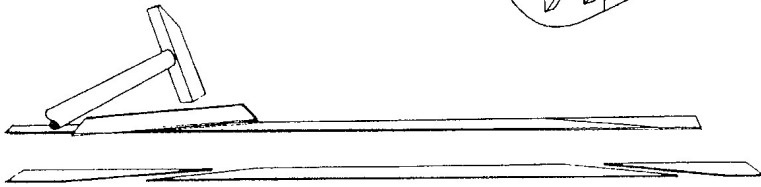


FIG. 3

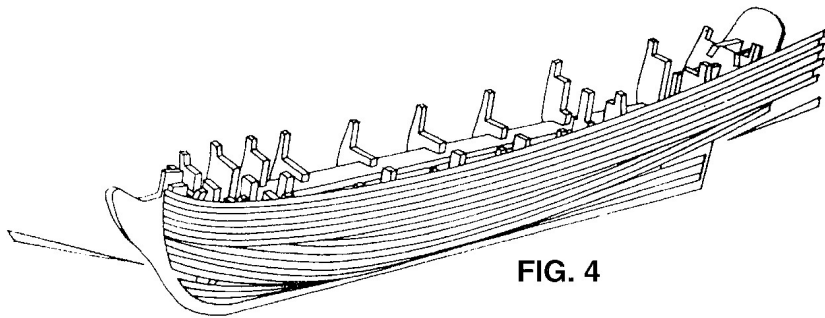


FIG. 4

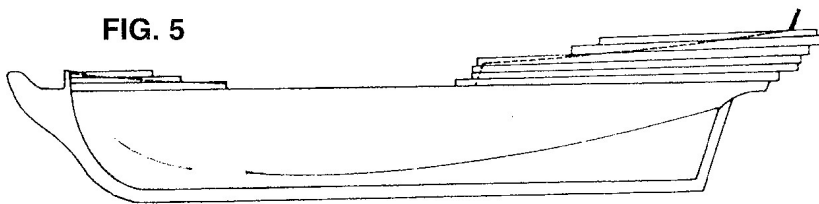


FIG. 5

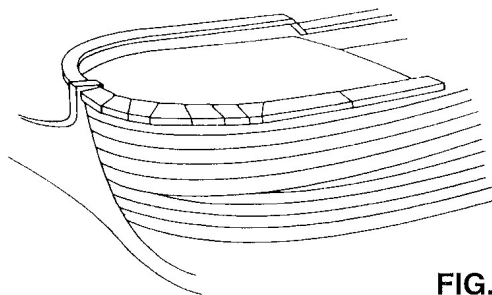


FIG. 6

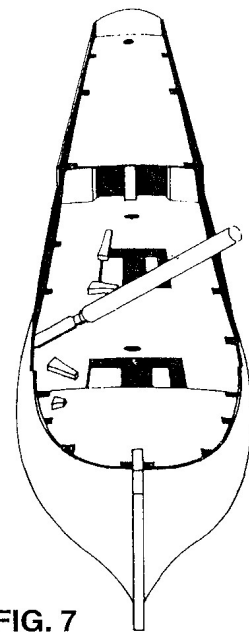


FIG. 7