


29 SP\*

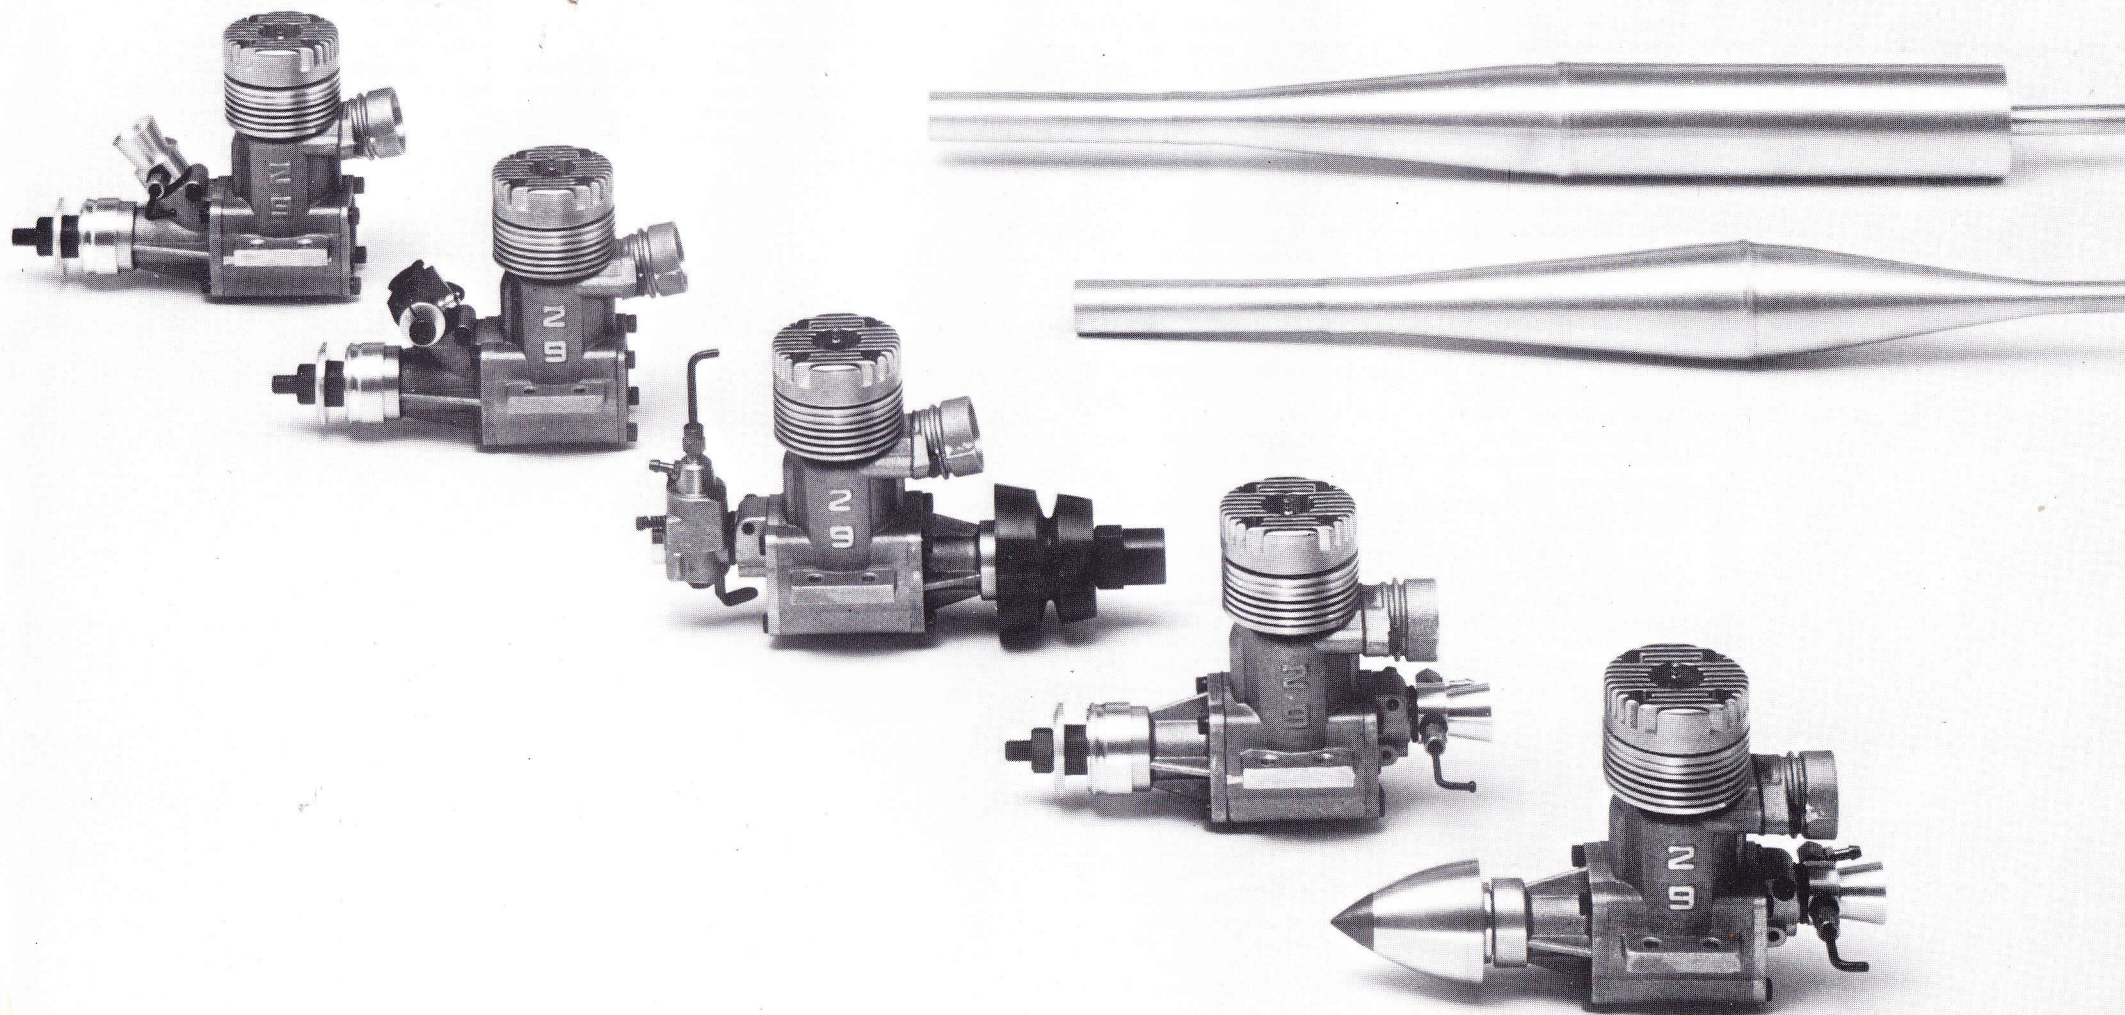

Art. 842 - 29 Speed SPA STD

Art. 841 - 29 Speed SPA RCA

Art. 837 - 29 Speed SPP RCB & pipe ss


Art. 838 - 29 Speed SPP STD

Art. 836 - 29 Speed SPP VAA & pipe std



|     |                                |                            |     |                             |                                 |
|-----|--------------------------------|----------------------------|-----|-----------------------------|---------------------------------|
| 202 | Testa aerea                    | Finned head                | 632 | Giunto maschio Europa 5MA   | Universal joint male Europe 5MA |
| 203 | Accoppiamento standard ABC     | Standard ABC cyl/piston    | 650 | Presa pressione pipa        | Pressure-pipe plug              |
| 204 | Spinotto                       | Wrist pin                  | 655 | Giunto maschio USA          | Universal joint male USA        |
| 207 | Monoblocco SP                  | Rear exhaust crankcase     | 684 | Vite valvola tipo 77        | 77 Rotor screw                  |
| 230 | Ogiva completa                 | Spinner assembly           | 698 | Prese acqua testa           | Water inlet watercooled head    |
| 237 | Accoppiamento pipa ABC         | Piped ABC cyl/piston       | 901 | Carb. RC marino OPS Ø 9 mm  | RC Boat carb. OPS Ø 9 mm        |
| 241 | Guarnizioni testa              | Head gasket                | 903 | Carb. RC aereo Perry Ø 6 mm | RC Air carb. Perry Ø 6 mm       |
| 295 | Cappello testa raff. acqua     | Watercooled head cover     | 905 | Carb. RC aereo Perry Ø 7 mm | RC Air carb. Perry Ø 7 mm       |
| 296 | Inserto testa raff. acqua      | Watercooled head insert    | 907 | Carb. RC marino OPS Ø 8 mm  | RC Boat carb. OPS Ø 8 mm        |
| 042 | Raccordo silicone scarico      | Silicone exhaust connector | 941 | Spillo OPS                  | OPS needle                      |
| 062 | Dado blocca elica              | Propeller nut              |     |                             |                                 |
| 063 | Ranella blocca elica           | Propeller washer           |     |                             |                                 |
| 064 | Porta elica completo           | Propeller adapter assembly |     |                             |                                 |
| 065 | Porta elica                    | Propeller adapter          |     |                             |                                 |
| 066 | Cono porta elica               | Propeller adapter cone     |     |                             |                                 |
| 069 | Silenziatore SP                | Muffler SP                 |     |                             |                                 |
| 401 | Vite testa e tappo ant.        | Head & Front Plate Screw   |     |                             |                                 |
| 405 | Anellini spinotto              | Wrist pin retainer         |     |                             |                                 |
| 406 | Biella normale                 | Standard connecting rod    |     |                             |                                 |
| 408 | Attacco scarico dritto         | Straight exhaust adapter   |     |                             |                                 |
| 409 | Tappo anteriore OOP            | Front plate OOP            |     |                             |                                 |
| 410 | Albero OOP (valvola 411)       | Crankshaft OOP (rotor 411) |     |                             |                                 |
| 411 | Valvola tela bakelizzata       | Phenolic rotor             |     |                             |                                 |
| 412 | Guarnizione tappi              | Plates gasket              |     |                             |                                 |
| 413 | Tappo post. OOP (valvola 411)  | Rear plate OOP (rotor 411) |     |                             |                                 |
| 414 | Fermo carburatore              | Carburettor retainer       |     |                             |                                 |
| 417 | Anello scarico OR              | Exhaust O-Ring             |     |                             |                                 |
| 419 | Presa pressione carter         | Pressure case plug         |     |                             |                                 |
| 420 | Cuscinetto post. OOA           | Rear ball bearing OOA      |     |                             |                                 |
| 422 | Tappo anteriore OOA            | Front plate OOA            |     |                             |                                 |
| 423 | Albero OOA                     | Crankshaft OOA             |     |                             |                                 |
| 424 | Tappo posteriore OOA           | Rear plate OOA             |     |                             |                                 |
| 425 | Tappo post. e pompa Perry      | Rear plate & Perry pump    |     |                             |                                 |
| 426 | Venturi Ø 6 mm.                | Venturi Ø 6 mm             |     |                             |                                 |
| 428 | Pipa nitro                     | Nitro pipe                 |     |                             |                                 |
| 429 | Venturi Ø 10 mm                | Venturi Ø 10 mm            |     |                             |                                 |
| 433 | Gruppo spillo speed            | Speed needle assembly      |     |                             |                                 |
| 435 | Cuscinetto anteriore           | Front ball bearing         |     |                             |                                 |
| 436 | Cuscinetto poster. OOP         | Rear ball bearing OOP      |     |                             |                                 |
| 439 | Vite tappo posteriore          | Rear plate screw           |     |                             |                                 |
| 442 | Guarnizione scarico SP         | Exhaust gasket SP          |     |                             |                                 |
| 451 | Biella special                 | Special connecting rod     |     |                             |                                 |
| 454 | Volano completo                | Flywheel assembly          |     |                             |                                 |
| 456 | Giunto femmina                 | Universal joint female     |     |                             |                                 |
| 461 | Albero (valvola 468)           | Shaft (rotor 468)          |     |                             |                                 |
| 466 | Tappo posteriore (valvola 468) | Rear plate (rotor 468)     |     |                             |                                 |
| 467 | Perno valvola                  | Rotor shaft                |     |                             |                                 |
| 468 | Valvola acciaio                | Steel rotor                |     |                             |                                 |
| 488 | Attacco scarico angolato       | Angled exhaust adaptor     |     |                             |                                 |
| 492 | Pipa silenziata SS             | SS pipe                    |     |                             |                                 |
| 493 | Volano                         | Flywheel                   |     |                             |                                 |
| 494 | Cono volano                    | Flywheel cone              |     |                             |                                 |
| 497 | Viti testa raff. acqua         | Watercooled head screws    |     |                             |                                 |



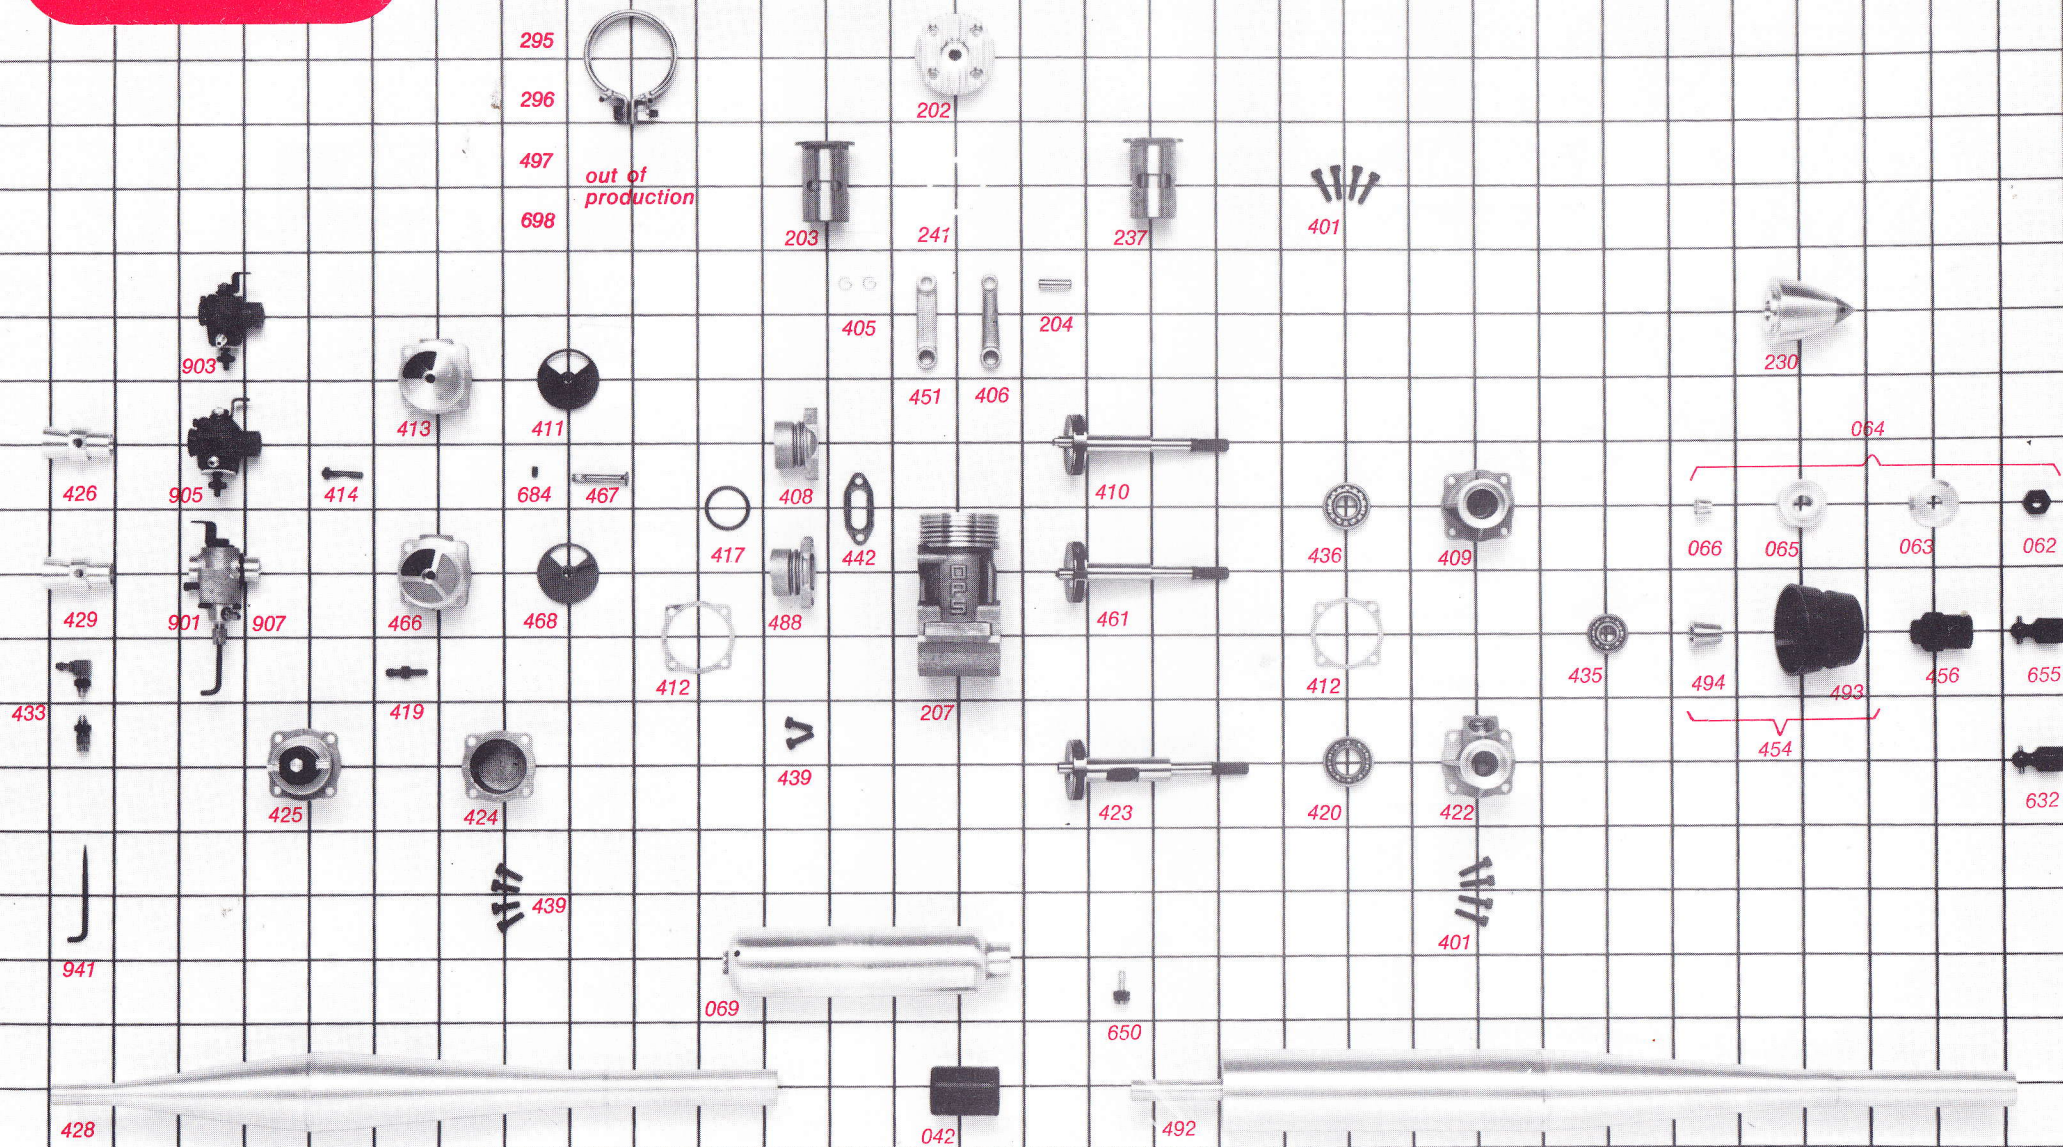



| Tipo / Type / Typ / Version | Cilindrata / Displacement<br>Hubraum / Cylindrée | Alesaggio / Bore<br>Bohrung / Alesage | Corsa / Stroke<br>Hub / Course | Peso / Weight<br>Gewicht / Poids | Potenza / Power *<br>Leistung / Puissance | A giri / At R.P.M.<br>U-min. / Tours | Pipa / Pipe<br>Resonanzrohre / Pipe |
|-----------------------------|--------------------------------------------------|---------------------------------------|--------------------------------|----------------------------------|-------------------------------------------|--------------------------------------|-------------------------------------|
| 29 Speed SPP VAA            | 4,93 cc                                          | 18,80 mm                              | 17,80 mm                       | 350 gr                           | 1,80 HP                                   | 25.000                               | Si                                  |
| 29 Speed SPP RCB            | 4,93 cc                                          | 18,80 mm                              | 17,80 mm                       | 520 gr                           | 1,80 HP                                   | 25.000                               | Si                                  |
| 29 Speed SPP STD            | 4,93 cc                                          | 18,80 mm                              | 17,80 mm                       | 350 gr                           | 1,20 HP                                   | 20.000                               | -                                   |
| 29 Speed SPA RCA            | 4,93 cc                                          | 18,80 mm                              | 17,80 mm                       | 340 gr                           | 0,90 HP                                   | 14.000                               | -                                   |
| 29 Speed SPA STD            | 4,93 cc                                          | 18,80 mm                              | 17,80 mm                       | 320 gr                           | 0,90 HP                                   | 14.000                               | -                                   |

\* Miscela standard — Standard fuel — Standard Mischung — Carburant standard.

